



WR40-4X

ULTRA MINI-MATRIX REMOTE CONTROL

A purpose-built remote control for the Ultra Mini-Matrix product line, delivering intuitive, pre-programmed preset control with RGB-illuminated keys.

The RS-232 Remote Control for the Ultra Mini-Matrix is purpose-built to mirror the system’s functionality and preset configurations, enabling fast and intuitive operation. The remote-control units feature RGB-illuminated buttons for clear input source selection and Multiview layout control. Available in 4-port and 8-port models, they provide intuitive

control across single and dual-display environments. The 8-port cascadable model provides full control over all sources when using dual displays. Designed for reliability and consistency, the units enable operators to fully leverage the Ultra Mini-Matrix functionality with minimal training.

SPECIFICATIONS

MODEL	WR40-4X	WR80-4X
P/N	CPN38041	CPN38043
Description	4-Port Ultra Mini-Matrix Remote Control	8-Port Ultra Mini-Matrix Remote Control
Compatibility	SX42PHU-4X	SC82PHU-4X
Cascading	N/A	Yes
Channel Selection Buttons	8 Buttons	
Button Illumination	10 colors, reflecting the assigned colors to each source in the Ultra Mini-Matrix	
Layout Preset Selection Buttons	4 Buttons	
Button Illumination	Active/Inactive status light showing selected layout preset	
Active Channel Indication	The channel controlled by the mouse and keyboard is indicated by a blinking light on the linked button	
Layout Preset Selection Buttons	Active/Inactive status light showing selected layout preset	
Dimensions	18 (W) x 9 (L) x 3 (H) cm / 7.086 (W) x 3.54 (L) x 1.18 (H) inch	
Weight	0.092 Kg (0.2 lbs)	
Compliance	TAA & BAA	
Manufactured	USA / Israel	
Product life-cycle	10 years	
Warranty	2 years	

1 INPUT SOURCE SELECTION BUTTONS (4-PORT AND 8-PORT MODELS)


Buttons are arranged in clearly defined groups for direct input selection.

4-Port Model:


Buttons are arranged in two groups of four. In single-display or Duplicate Mode configurations, the left group controls the active input source. In Matrix (side-by-side) View, the left group controls the left view, while the right group controls the right view. In dual-display configurations, each group controls a display.

8-Port Model:

In single-display or Duplicate Mode configurations, a single remote provides access to all eight input sources. In dual-display configurations, an additional cascaded remote enables independent, display-specific input source selection.

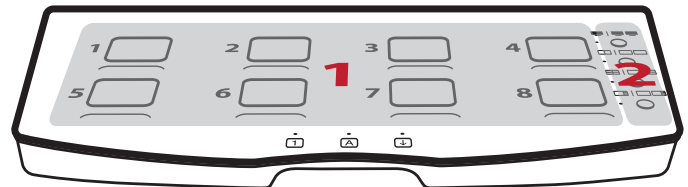

4-Port Remote Control - WR40-4X

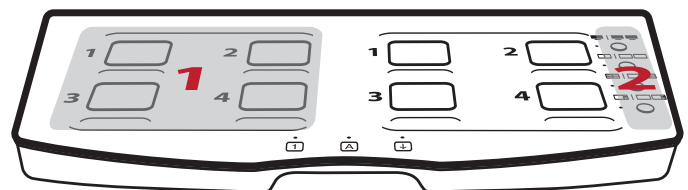


8-Port Remote Control - WR80-4X

2 MULTIVIEW LAYOUT PRESET SELECTION BUTTONS (4-PORT AND 8-PORT MODELS)

Provides direct access to predefined display layouts for efficient and consistent visualization.

- Toggle between Single-Display/Duplicate Mode and Dual-Display/Extended Mode
- Toggle between Matrix (side-by-side) View and Picture-in-Picture View
- Switch to Tile View
- Switch to Scale View

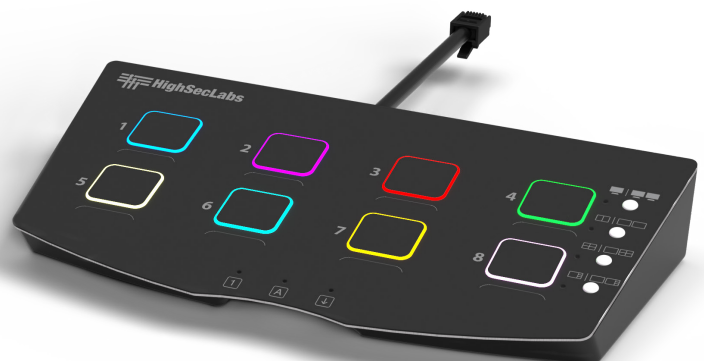

WR80-4X