

# HSL'S 1U 6 ISOLATORS KIT

Includes HSL's PDUI 12 power distribution unit and 6 Isolators installed in a specially designed chassis for mounting in a network cabinet.



RK-1U6-FI11PH-M


For redundancy, the 1U Isolator kit has a second power input and is designed to be used in mission-critical or data center applications.

## MODELS:

MODEL	DESCRIPTION
RK-1U6-FI11PH-M	6 DP/HDMI KVM Isolators 1U Metal Chassis Tray Kit
RK-1U6-FV11PH-M	6 DP/HDMI Video Isolators 1U Metal Chassis Tray Kit
RK-1U6-FI11H-M	6 HDMI KVM Isolators 1U Metal Chassis Tray Kit
RK-1U6-FV11H-M	6 HDMI Video Isolators 1U Metal Chassis Tray Kit
PDUI12M	Mini 12 Port 12v DC Junction Box



PDUI12M

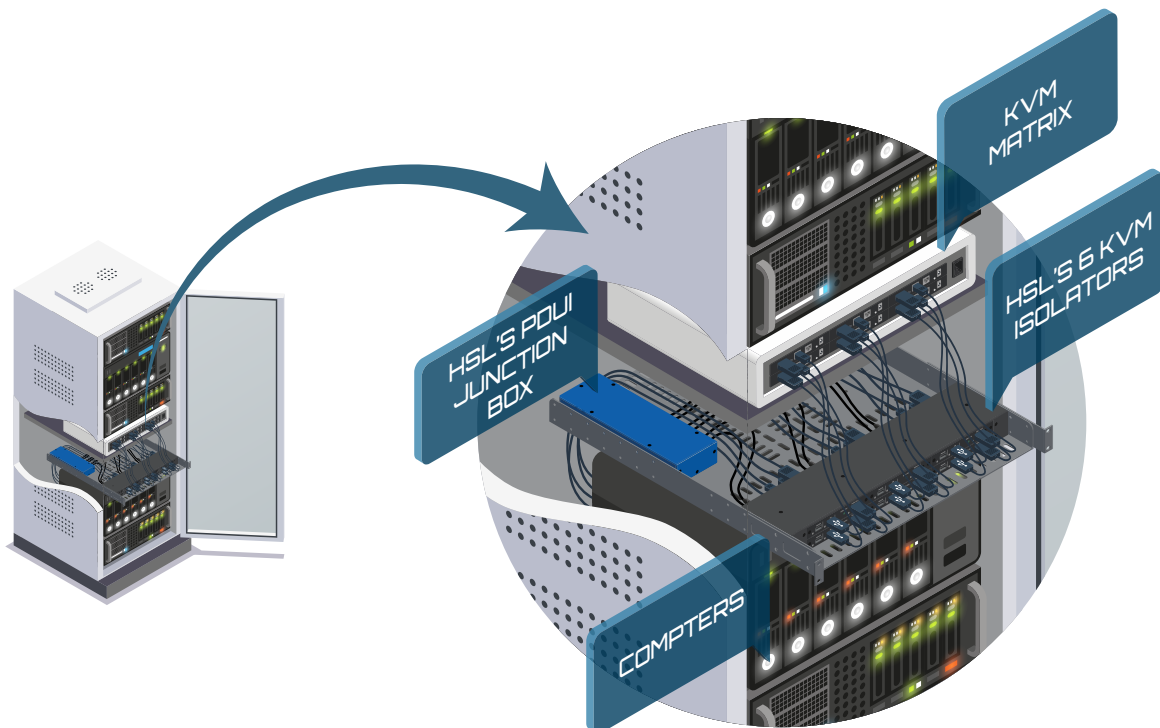

## SPECIFICATION

PART NUMBER	RK-1U6-FV11PH-M	RK-1U6-FV11H-M	RK-1U6-FI11PH-M	RK-1U6-FI11H-M
<b>CONSOLE PORTS</b>				
<b>Displays</b>	6 x DP/HDMI	6 x HDMI 1.4	6 x DP/HDMI	6 x HDMI 1.4
<b>Max Resolution (Input &amp; Output)</b>	3840x2160 @ 30 Hz	3840x2160 @ 30 Hz	3840x2160 @ 30 Hz	3840x2160 @ 30 Hz
<b>Mouse and Keyboard</b>	N/A	N/A	USB Type A	USB Type A
<b>COMPUTER PORTS</b>				
<b>Display Type</b>	6 x DP/HDMI	6 x HDMI 1.4	6 x DP/HDMI	6 x HDMI 1.4
<b>Mouse and Keyboard</b>	N/A	N/A	USB Type B	USB Type B
<b>PHYSICAL</b>				
<b>Dimensions</b>	550 x 448 x 44.3 mm / 21.6 x 17.6 x 1.7 inches			
<b>Weight</b>	5.5 kg / 12.12 lb			
<b>POWER</b>				
<b>Power Requirements</b>	Redundant 110V-220V AC-DC Power Supply			
<b>ENVIRONMENTAL</b>				
<b>Operating Temperature</b>	32° to 104° F (0° to 40° C)			
<b>Storage Temperature</b>	-4° to 140° F (-20° to 60° C)			
<b>Humidity</b>	20 to 80% non condensing; Storage – 10 to 90% non condensing			
<b>SOFTWARE</b>				
<b>Supported OS</b>	Windows, Linux, Mac			
<b>GENERAL INFO</b>				
<b>Made In</b>	ISRAEL			
<b>Product life-cycle</b>	10 years			
<b>Warranty</b>	2 Years			



RK-1U6-FV11PH-M



RK-1U6-FV11H-M



RK-1U6-FI11PH-M



RK-1U6-FI11H-M