

### INTRODUCTION

- High Sec Labs is the world's leading manufacturer of peripheral sharing cybersecurity products.
- Products are manufactured in secure, BAA/TAA compliant facilities in Huntsville, AL.
- The accessories portfolio facilitates
  - Installation
  - Product use
  - Product interconnectivity
  - Protocol conversions
  - Dense and centralized installations







# ACCESSORIES PORTFOLIO









**Docking Stations** 











**Power Distribution** 









# CABLES: KVM



# CABLES: USB C to KVM INTERCONNECT





### **CABLES:** ASSORTED

HSL cables are a critical part of a secure KVM system. The switch's security evaluation and testing are done with HSL approved cable sets to assure signal integrity and radiated emissions level.










# **MOUNTING PRODUCTS**

#### 16.203 4.691 2.007 3.2021,44 10809.09

#### **1U 6 ISOLATORS RACKMOUNT KIT**

For 6 Isolators, with redundant power supply, all in a 19" 1U tray.

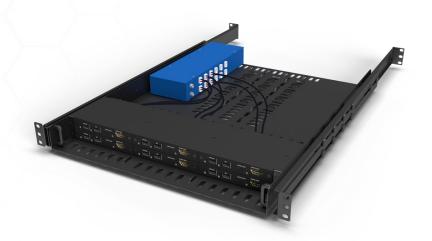

#### **KVM Under-Desk mounting kits**

#### **4U 19" MOUNTING KIT**

For 10 Isolators





# POWER DISTRIBUTION UNITS

#### **12/24 Outlet Power Distribution Unit**

- Supplies up to 12/24 Isolators from a single power source.
- Redundant power supply.
- No need for an individual power supply for each Isolator
- Perfect for rack-mounted Isolators







### **REMOTE** CONTROLS

Remote controls enable operating a remote KVM product. The programmable remote can invoke pre-set configurations in addition to channel switching.









**8-Button Auxiliary Front Panel** 



1 2 3 4 5 6 7 8

**Secure Rugged** 



### **HDMI** SPLITTERS

- Source input can be DP or HDMI
- Output is either 2xHDMI or 4xHDMI
- Supports resolutions up to 4K 60Hz
- No drivers required
- Multiple pre-defined EDID files built in, or use the monitor's EDID
- Designed for 24/7 operation.







# PROTOCOL CONVERTER -RS232 to USB

- RS-232 to USB convertor.
- Allows serial RS-232 control of HSL KVM Combiner switches that do not have a built-in serial port.
- The serial control is used to invoke pre-sets and channel switching.






# USB-C DUAL HEAD DOCKING STATION

#### **Key Features**

- TAA & BAA Compliant
- Innovative DP/HDMI combo connector
- Two HDMI/DP video ports, at up to 4K 60Hz single-head and 4K 30Hz dual-head.
- Driverless 100W power delivery (PD 3.0)
- Sturdy, durable design.
- Built-in under-table mounting brackets.
- 4-port USB 2.0 hub
- RJ45 LAN input interface
- Model UK12PHC-N

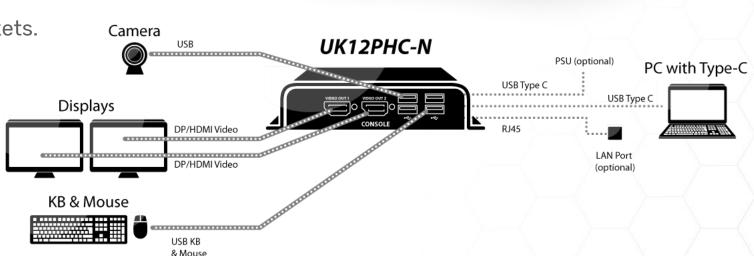



∰= HIghSocLabs



