


INTRODUCING THE ULTRA MINI-MATRIX

The **Ultra Mini-Matrix** empowers you with multi-viewing and scaling functionalities, consolidating and arranging multiple sources onto a single or dual screen display while maintaining absolute data separation, preventing any information from crossing over.

It's the ultimate solution for executive offices, meeting rooms, and operation centers, empowering users with seamless and secure access to critical information. displaying information from multiple sources simultaneously on one or two display screens.



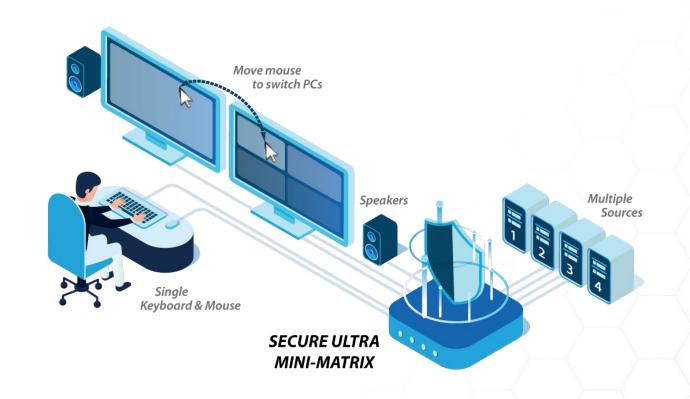

ULTRA MINI-MATRIX KEY FEATURES




• The Ultra Mini-Matrix is a **NIAP PP4.0 compliant**¹ KVM switch with Multiview functionality.





• Securely¹ view all computer sources on up to **two 4K displays** in various layout presets.



 An Autoscaler adjusts the incoming display resolution to match the selected Multiview layout preset.



 Easily switch controls between devices by dragging the cursor across the border.




¹ Applies to secure models only.

MULTIVIEW SINGLE DISPLAY LAYOUT PRESETS


The Ultra Mini-Matrix is equipped with a range of built-in Multiview presets, designed to maximize the operator's situational awareness.

Presets are selected using either keyboard hotkeys or via an external remote control.

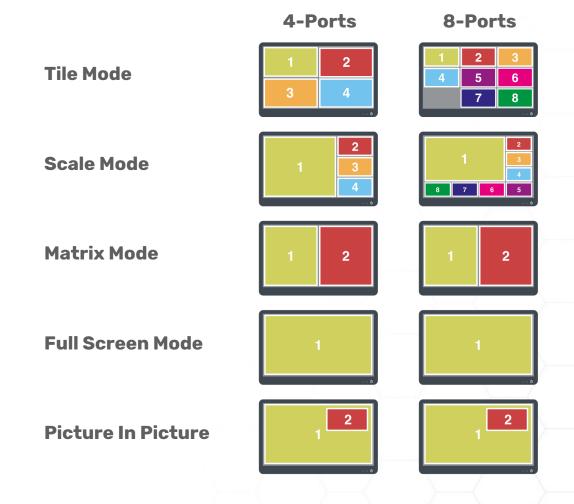



MULTIVIEW DUAL DISPLAY LAYOUT PRESETS

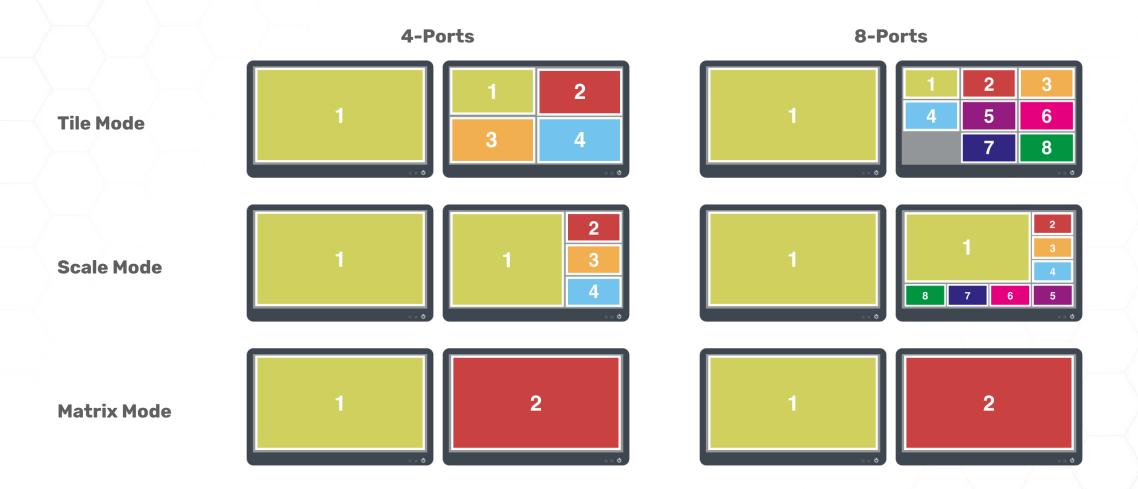



REMOTE CONTROL

The Ultra Mini-Matrix is compatible with HSL's 8-button programmable remote-control Unit (RCU).

- The RCU sends RS-232 commands to the Ultra Mini-Matrix, instructing it to perform functions such as:
 - ✓ Switch channels
 - √ Select display presets
 - ✓ Enable or Disable Picture-in-Picture
- One RCU can cascade into another, doubling the number of available functions.





LAYOUT CUSTOMIZATION ON-SCREEN DISPLAY

- The Ultra Mini-Matrix features an On-Screen Display (OSD) interface for easy customization of the following settings:
 - Video options
 - Channel display
 - Mouse controls
 - Audio mixing and volume
- The OSD uses intuitive menus to help create an optimal setup.
- The OSD can be accessed at any time via keyboard hotkeys.





SECURITY FEATURES (SECURE MODEL)

Filtered USB Security

 Whitelist or blacklist any USB device by its VID/PID to block unauthorized access, while preauthorizing authentication devices (CAC) by default.

Video Security

 Prevents video signal leakage and display manipulation by using complete electrical isolation between inputs and dedicated, read-only EDID emulators that block any potential data path from the display back to the computer.

Audio Security

Enforced unidirectional audio flow prevents repurposing speakers as microphones.

Keyboard & Mouse Security

 Enforces a secure, one-way data flow from peripherals to each computer using optical data diodes and dedicated USB emulation, blocking all reverse communication and non-HID data.

Anti-Tampering Assurances

 Security seals on the device and packaging reveal attempts to compromise the device.

Built for Trust

 The Ultra Mini-Matrix is TAA/BAA compliant and is produced using a secure supply chain.



COMMERCIAL FEATURES

Cross-Device Copy & Paste

 Copy & Paste text and files across devices as if they were the same device.

Mic Input (4-Port model)

 Share a single mic input with all 4 connected computers.

USB Connectivity

- Connect USB (3.0 Type A) devices to the user console.
 - 4-Port: Up to 4 connections
 - 8-Port: 1 connection



ULTRA MINI-MATRIX SPECS AND FEATURES

	Commercial		Secure - NIAP PP4.0 PSD Compliant	
Model Number	SX42PHU-NX	SX82PHU-NX	SX42PHU-4X	SX82PHU-4X
Input Ports				
Sources	4 Input Sources	8 Input Sources	4 Input Sources	8 Input Sources
Visual Input Format	Combo DP/HDMI	Combo DP/HDMI	Combo DP/HDMI	Combo DP/HDMI
Keyboard and Mouse	USB Type B	2x USB Type B	2x USB Type B	2x USB Type B
Audio Output (Speakers)	3.5mm audio port	3.5mm audio port	3.5mm audio port	3.5mm audio port
Audio Input (Mic)	3.5mm audio port	N/A	N/A	N/A
USB	USB 3.0 Type B	USB 2.0 Type B	N/A	N/A
Console				
Display Output Format	2 x HDMI	2 x HDMI	2 x Combo DP/HDMI	2 x Combo DP/HDMI
Max Display Resolution	Single 4K UHD monitor @30Hz / Dual 4K UHD monitors @ 30Hz	Single 4K UHD monitor @30Hz / Dual 4K UHD monitors @ 30Hz	Single 4K UHD monitor @30Hz / Dual 4K UHD monitors @ 30Hz	Single 4K UHD monitor @30Hz / Dual 4K UHD monitors @ 30Hz
Keyboard and Mouse	2 x USB Type A			
Audio Diode	None	None	Unidirectional audio diode	Unidirectional audio diode
Audio Output (Speakers)	3.5mm audio port	3.5mm audio port	3.5mm audio port	3.5mm audio port
Audio Input (Mic)	3.5mm audio port	N/A	N/A	N/A
USB	4 x USB 3.0 Type A	1 x USB 2.0 Type A	fUSB for CAC	fUSB for CAC
Multiview Remote Control	RCU Port	RCU Port	RCU Port	RCU Port
Peripheral Sharing				
KVM Switching	Mouse-controlled Switching	Mouse-controlled Switching	Mouse-controlled Switching	Mouse-controlled Switching
Multiview Preset Switching	Hotkeys / Remote Control Unit			
Cross-device Copy/Paste	Text + Files	Text + Files	N/A	N/A



ORDERING INFORMATION

Product Description	Model Number	
INPUT PORTS		
Secure 4-Port DP/HDMI Ultra Mini-Matrix, PP4.0 Compliant	SX42PHU-4X	
Secure 8-Port DP/HDMI Ultra Mini-Matrix, PP4.0 Compliant	SX82PHU-4X	
Commercial 4-Port DP/HDMI Ultra Mini-Matrix	SX42PHU-NX	
Commercial 8-Port DP/HDMI Ultra Mini-Matrix	SX82PHU-NX	
Programmable 8-Button Remote Control Unit	WR80PC-4	







